



Wharfedale
Pro


MODEL : **DELTA X10**

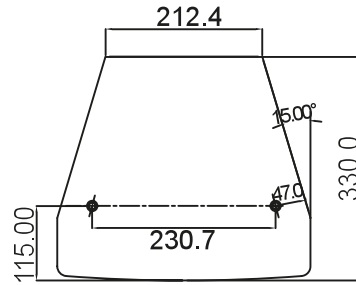


TOP VIEW

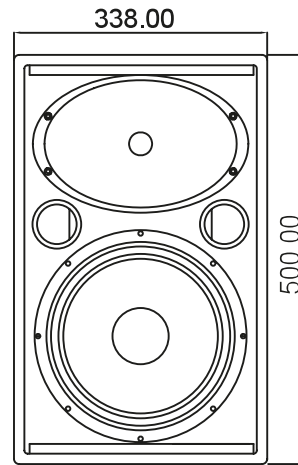


FRONT VIEW



BOTTOM VIEW

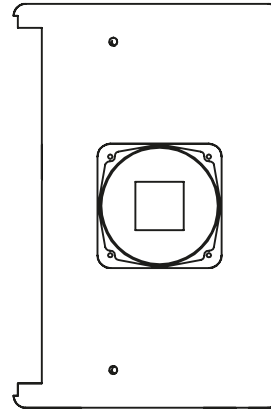

SIDE VIEW

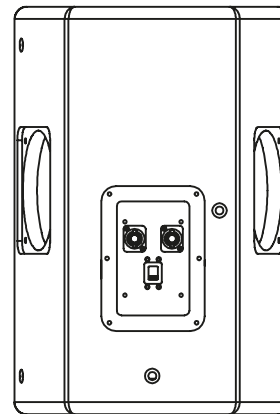

REAR VIEW

System Type	Passive
Configuration	Two-way
Frequency Response (+/-3dB)	65-20KHZ
Frequency Range (- 10 dB)	60-20KHZ
Sensitivity (2.83v/1m)	97dB
Calculated Maximum SPL @1m	128dB
System Rated Impedance	8Ω
Low Frequency Transducer	
Size	288mm / 10" Paper
Voice Coil Size	63.5mm / 2.5"
Rated Impedance	8Ω
LF Power (re:AES2-2012)	300W
High Frequency Transducer	
HF Driver Type	Compression Driver
Voice Coil Size	44.5mm / 1.75" Titanium
Exit Size	25.4mm / 1"
Diaphragm Material	Titanium
Rated Impedance	8Ω
HF Power (re:AES2-2012)	40W
Nominal Coverage (H x V)	90° x 60°
Power	
System Continuous Power	300W
System Programme Power	600W
System Peak Power	1200W
Crossover frequency	2.8kHz
Input Connector	2 x NL4 (speakON Compatible)
Hardware	
Pole Mount	Dual Angle (0° / 10°) 35mm Socket
Handles	2 on Sides
Rigging points	9 x M10
Enclosure Material	15mm Plywood
Finish	black paint
Grille Material & Finish	1.5 mm Steel Black or White
Dimensions - Unpacked	
Height	500mm / 19.7"
Width Front	338mm / 13.3"
Width Rear	212.4mm / 8.4"
Depth	330mm / 13.0"
Dimensions - Packed	
Height	575mm / 22.6"
Width Front	400mm / 15.7"
Width Rear	300mm / 11.8"
Depth	386mm / 15.2"
Weight	
Net Weight (kg / lbs)	16.58kg / 36.5lbs
Gross Weight (kg / lbs)	19.6kg / 43lbs