




MODEL : **DELTA X15B**

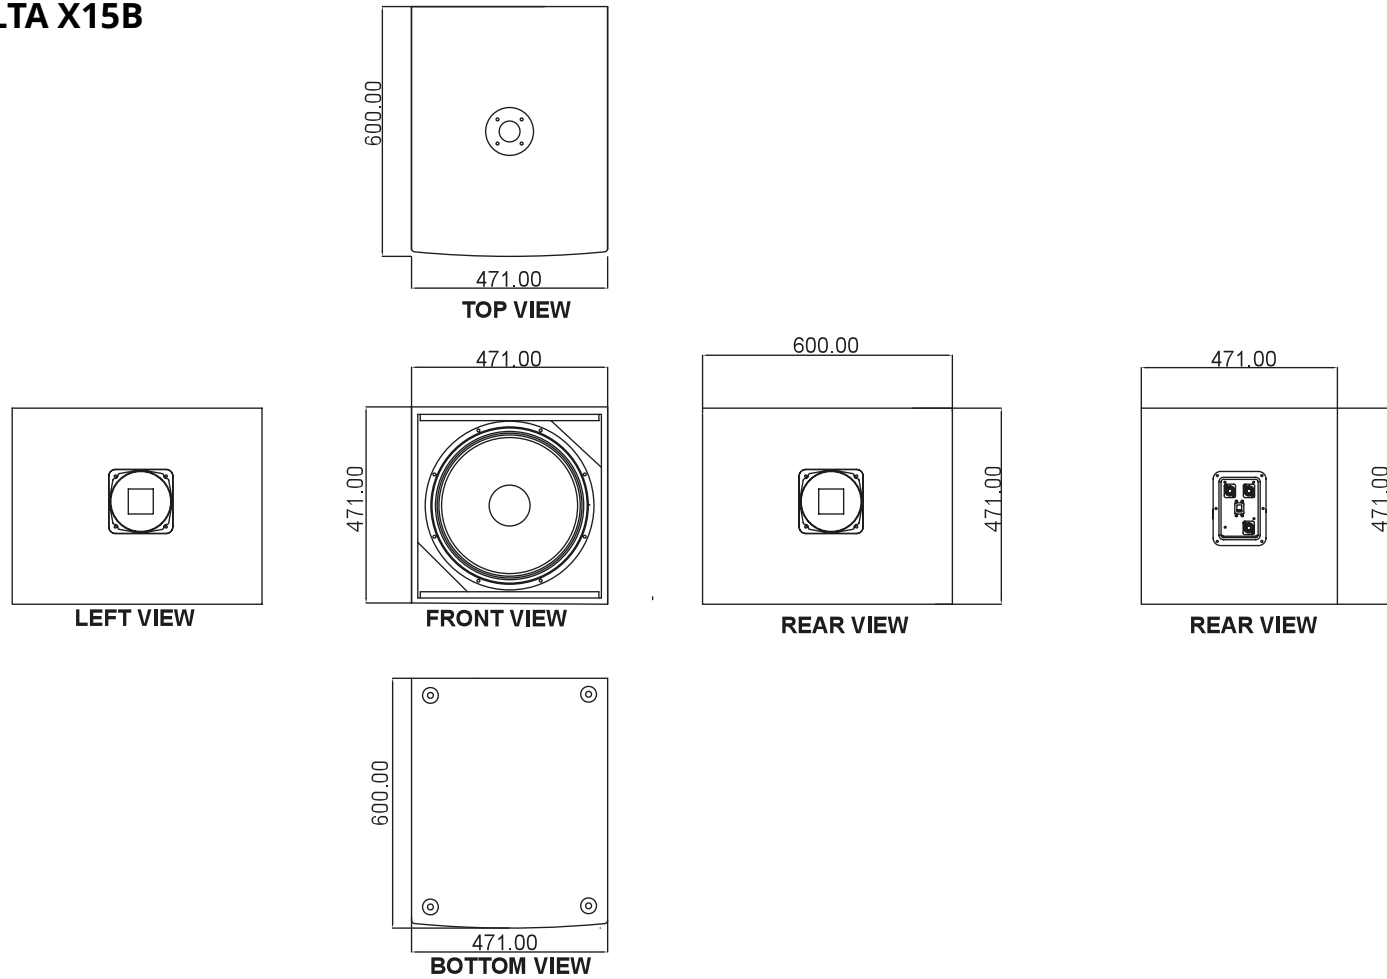

System Type	Passive
Configuration	Subwoofer
Frequency Response (+/-3dB)	42-2KHZ(BI-AMP)
Frequency Range (- 10 dB)	38-150HZ
Sensitivity (2.83v/1m)	98dB
Calculated Maximum SPL @1m	132dB
System Rated Impedance	8Ω or 4Ω
<b>Low Frequency Transducer</b>	
Size	404mm / 15"
Voice Coil Size	102mm / 4"
Rated Impedance	8Ω or 4Ω
LF Power (re:AES2-2012)	700W
<b>High Frequency Transducer</b>	
HF Driver Type	-
Voice Coil Size	-
Exit Size	-
Diaphragm Material	-
Rated Impedance	-
HF Power (re:AES2-2012)	-
Nominal Coverage (H x V)	-
<b>Power</b>	
System Continuous Power	700W
System Programme Power	1400W
System Peak Power	2800W
Crossover frequency	-
Input Connector	2 x NL4 (speakON Compatible)
<b>Hardware</b>	
Pole Mount	35mm
Handles	2 on Sides
Rigging points	-
Enclosure Material	15mm Plywood
Finish	black paint
Grille Material & Finish	1.5 mm Steel Black
<b>Dimensions - Unpacked</b>	
Height	471mm / 18.5"
Width Front	471mm / 18.5"
Width Rear	471mm / 18.5"
Depth	600mm / 23.6"
<b>Dimensions - Packed</b>	
Height	556mm / 21.9"
Width Front	543mm / 21.4"
Width Rear	543mm / 21.4"
Depth	672mm / 26.5"
<b>Weight</b>	
Net Weight (kg / lbs)	31.5kg / 69.4lbs
Gross Weight (kg / lbs)	35.12kg / 77.4lbs