



Wharfedale  
Pro


MODEL : DELTA X218B

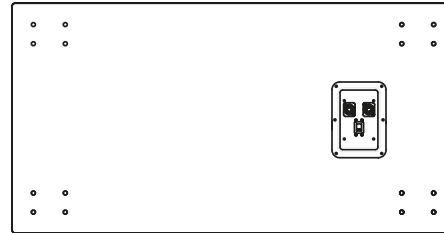


REAR VIEW




TOP VIEW



SIDE VIEW

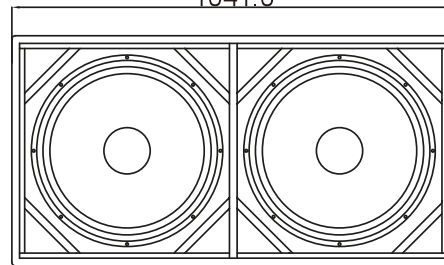

FRONT VIEW



SIDE VIEW



BOTTOM VIEW

System Type	Passive
Configuration	Dual Chamber Subwoofer
Frequency Response (+/-3dB)	30-1.5KHZ
Frequency Range (- 10 dB)	30-1.5KHZ
Sensitivity (2.83v/1m)	100dB
Calculated Maximum SPL @1m	138dB
System Rated Impedance	Parallel:4Ω Discrete:8Ω x2
<b>Low Frequency Transducer</b>	
Size	470mm / 18"
Voice Coil Size	102mm / 4"
Rated Impedance	2x8Ω
LF Power (re:AES2-2012)	800W
<b>High Frequency Transducer</b>	
HF Driver Type	-
Voice Coil Size	-
Exit Size	-
Diaphragm Material	-
Rated Impedance	-
HF Power (re:AES2-2012)	-
Nominal Coverage (H x V)	-
<b>Power</b>	
System Continuous Power	1600W Parallel / 800W Discrete
System Programme Power	3200W Parallel / 1600W Discrete
System Peak Power	6400W Parallel / 3200W Discrete
Crossover frequency	-
Input Connector	2 x NL4 (speakON Compatible)
<b>Hardware</b>	
Pole Mount	
Handles	4 on Sides
Rigging points	-
Enclosure Material	18mm Plywood
Finish	black paint
Grille Material & Finish	1.5 mm Steel Black
<b>Dimensions - Unpacked</b>	
Height	541mm / 21.3"
Width Front	1041mm / 41.0"
Width Rear	1041mm / 41.0"
Depth	650mm / 25.6"
<b>Dimensions - Packed</b>	
Height	626mm / 25.6"
Width Front	1126mm / 44.3"
Width Rear	1126mm / 44.3"
Depth	722mm / 28.4"
<b>Weight</b>	
Net Weight (kg / lbs)	78.9kg / 173.9lbs
Gross Weight (kg / lbs)	86.0kg / 189.6lbs