



Wharfedale
Pro


MODEL : DELTA X12M




TOP VIEW

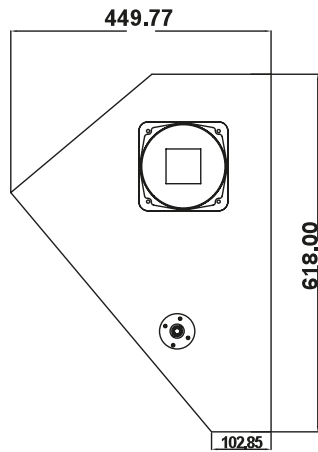


LEFT SIDE VIEW

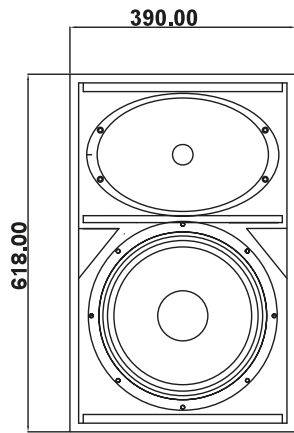


FRONT VIEW

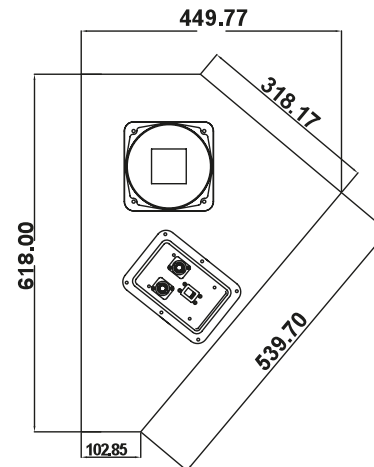

RIGHT SIDE VIEW

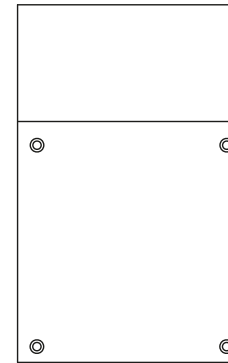

BOTTOM VIEW



BOTTOM VIEW

System Type	Passive
Configuration	Two-way
Frequency Response (+/-3dB)	60-20KHZ
Frequency Range (- 10 dB)	55-20KHZ
Sensitivity (2.83v/1m)	97dB
Calculated Maximum SPL @1m	129dB
System Rated Impedance	8Ω
Low Frequency Transducer	
Size	332mm / 12" Paper
Voice Coil Size	77.1mm / 3"
Rated Impedance	8Ω
LF Power (re: AES2-2012)	400W
High Frequency Transducer	
HF Driver Type	Compression Driver
Voice Coil Size	50.8mm / 2" Titanium
Exit Size	35.6mm / 1.4"
Diaphragm Material	Titanium
Rated Impedance	8Ω
HF Power (re: AES2-2012)	50W
Nominal Coverage (H x V)	90° x 45°
Power	
System Continuous Power	400W
System Programme Power	800W
System Peak Power	1600W
Crossover frequency	1.8kHz
Input Connector	2 x NL4 (speakON Compatible)
Hardware	
Pole Mount	
Handles	2 on Sides
Rigging points	-
Enclosure Material	15mm Plywood
Finish	black paint
Grille Material & Finish	1.5 mm Steel Black
Dimensions - Unpacked	
Height	449(SITU)mm / 17.7"
Width Front	390mm / 15.4"
Width Rear	390mm / 15.4"
Depth	618mm / 24.3"
Dimensions - Packed	
Height	462mm / 18.2"
Width Front	690mm / 27.2"
Width Rear	690mm / 27.2"
Depth	522mm / 20.6"
Weight	
Net Weight (kg / lbs)	23.18kg / 50.9lbs
Gross Weight (kg / lbs)	28.5kg / 62.7lbs