
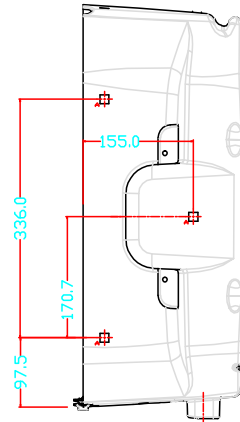
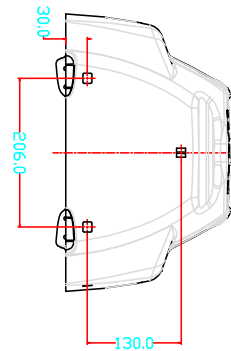


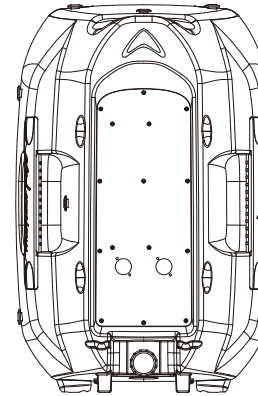
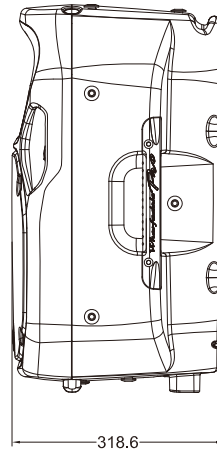
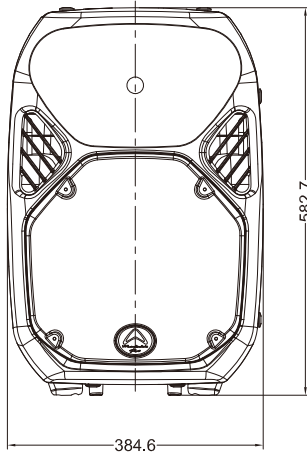
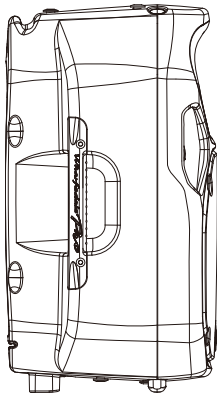


Wharfedale
Pro

MODEL : TITAN 12Z



System Type	Passive
Configuration	12" 2-way
Frequency Response (+/-3dB)	55Hz-20kHz
Frequency Range (-10 dB)	50Hz-20kHz
Sensitivity (2.83v/1m)	99dB
Calculated Maximum SPL @1m	132dB
System Rated Impedance	8Ω
Low Frequency Transducer	
Size	305mm / 12"
Voice Coil Size	75mm / 3.0"
Rated Impedance	8Ω
LF Power (re:AES2-2012)	500w
High Frequency Transducer	
HF Driver Type	Compression Driver
Voice Coil Size	44mm / 1.75"
Exit Size	25mm / 1"
Diaphragm Material	Titanium
Rated Impedance	8Ω
HF Power (re:AES2-2012)	40W
Nominal Coverage (H x V)	Hybrid Symmetry Horn 100°x80°
Power	
System Continuous Power	500w
System Programme Power	1000w
System Peak Power	2000w
Crossover frequency	2.1kHz
Input Connector	2 x NL4 (speakON compatible)
Hardware	
Pole Mount	35mm with lock screw
Handles	2 on sides
Rigging points	M8 * 10
Enclosure	
Enclosure Material	Trapezoidal / Polypropylene
Finish	Black / white
Grille Material & Finish	
Dimensions - Unpacked	1.2 steel
Height	582.7mm / 22.9"
Width Front	384.6mm / 15.1"
Width Rear	384.6mm / 15.1"
Depth	318.6mm / 12.5"
Dimensions - Packed	
Height	663mm / 26.1"
Width Front	435mm / 17.1"
Width Rear	435mm / 17.1"
Depth	408mm / 16.1"
Weight	
Net Weight (kg / lbs)	15.7kg / 34.5lbs
Gross Weight (kg / lbs)	18.8kg/41.2lbs