
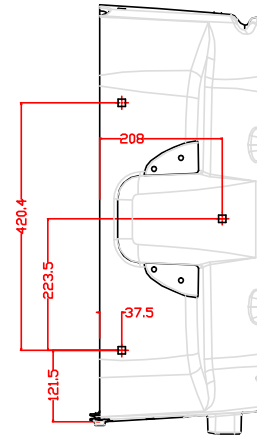



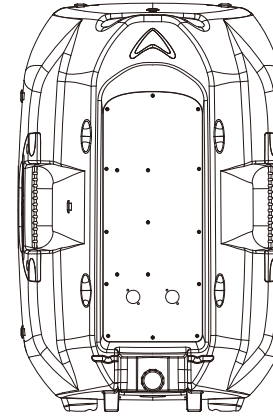
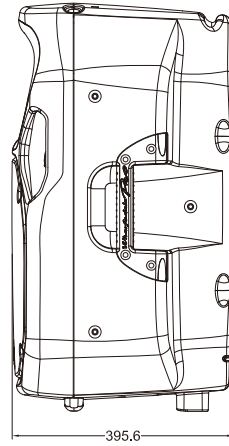
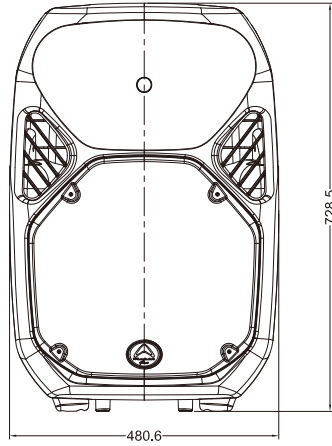
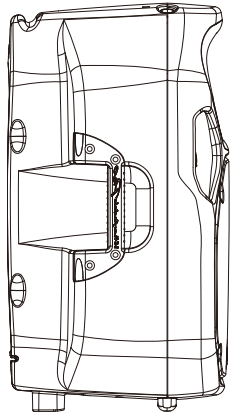


Wharfedale
Pro

MODEL : **TITAN 15Z**



System Type	Passive
Configuration	15" 2-way
Frequency Response (+/-3dB)	45Hz-20kHz
Frequency Range (-10 dB)	40Hz-20kHz
Sensitivity (2.83v/1m)	99dB
Calculated Maximum SPL @1m	133.5dB
System Rated Impedance	8Ω
Low Frequency Transducer	
Size	381mm / 15"
Voice Coil Size	100mm / 4.0"
Rated Impedance	8Ω
LF Power (re:AES2-2012)	700w
High Frequency Transducer	
HF Driver Type	Compression Driver
Voice Coil Size	50mm / 2.0"
Exit Size	25mm / 1"
Diaphragm Material	Titanium
Rated Impedance	8Ω
HF Power (re:AES2-2012)	50W
Nominal Coverage (H x V)	Hybrid Symmetry Horn 100°x80°
Power	
System Continuous Power	700W
System Programme Power	1400W
System Peak Power	2800W
Crossover frequency	2.1kHz
Input Connector	2 x NL4 (speakON compatible)
Hardware	
Pole Mount	35mm with lock screw
Handles	2 on sides
Rigging points	M8 * 10
Enclosure	
Enclosure Material	Trapezoidal / Polypropylene
Finish	Black / white
Grille Material & Finish	
Grille Material	1.2 steel
Dimensions - Unpacked	
Height	728.5mm / 28.7"
Width Front	480.6mm / 18.9"
Width Rear	480.6mm / 18.9"
Depth	395.6mm / 15.6"
Dimensions - Packed	
Height	830mm / 32.7"
Width Front	514mm / 20.2"
Width Rear	514mm / 20.2"
Depth	489mm / 19.3"
Weight	
Net Weight (kg / lbs)	25.8kg / 56.8lbs
Gross Weight (kg / lbs)	30.6kg / 67.3lbs