
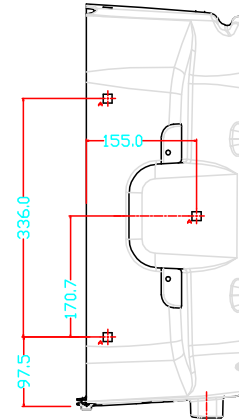
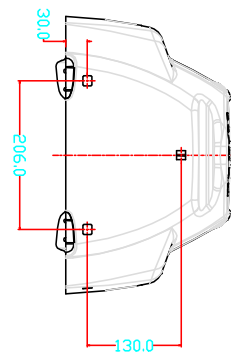


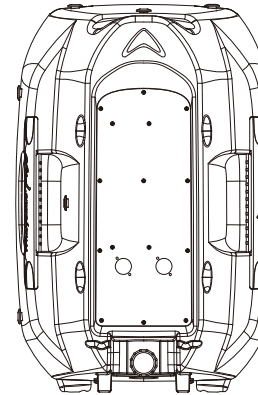
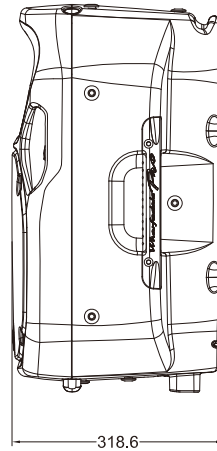
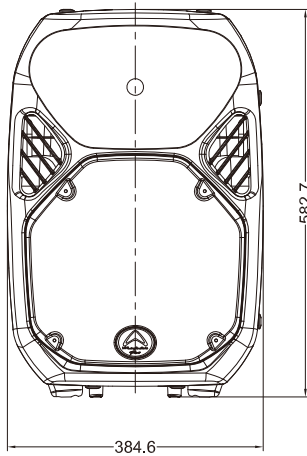
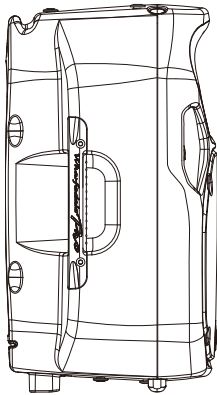


Wharfedale  
Pro

MODEL : **TITAN-X12**



System Type	Passive
Configuration	12" 2-way
Frequency Response (+/-3dB)	55Hz-20kHz
Frequency Range (-10 dB)	50Hz-20kHz
Sensitivity (2.83v/1m)	98dB
Calculated Maximum SPL @1m	128dB
System Rated Impedance	8Ω
<b>Low Frequency Transducer</b>	
Size	305mm / 12"
Voice Coil Size	64.26mm / 2.5"
Rated Impedance	8Ω
LF Power (re:AES2-2012)	250w
<b>High Frequency Transducer</b>	
HF Driver Type	Compression Driver
Voice Coil Size	44mm / 1.75"
Exit Size	25mm / 1"
Diaphragm Material	Titanium
Rated Impedance	8Ω
HF Power (re:AES2-2012)	40w
Nominal Coverage (H x V)	Hybrid Symmetry Horn 100°x80°
<b>Power</b>	
System Continuous Power	250w
System Programme Power	500w
System Peak Power	1000w
Crossover frequency	2.6kHz
Input Connector	2 x NL4 (speakON compatible)
<b>Hardware</b>	
Pole Mount	35mm with lock screw
Handles	2 on sides
Rigging points	M8 * 10
<b>Enclosure</b>	
Enclosure Material	Trapezoidal / Polypropylene
Finish	Black / white
Grille Material & Finish	1.2 steel
<b>Dimensions - Unpacked</b>	
Height	582.7mm / 22.9"
Width Front	384.6mm / 15.1"
Width Rear	384.6mm / 15.1"
Depth	318.6mm / 12.5"
<b>Dimensions - Packed</b>	
Height	663mm / 26.1"
Width Front	435mm / 17.1"
Width Rear	435mm / 17.1"
Depth	408mm / 16.1"
Weight	
Net Weight (kg / lbs)	12.0kg / 26.4lbs
Gross Weight (kg / lbs)	15.1kg / 33.2lbs