

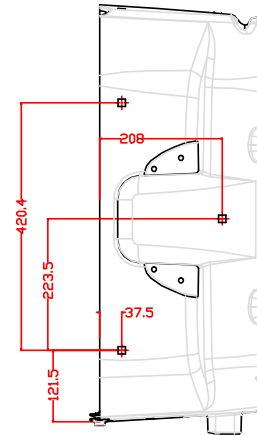



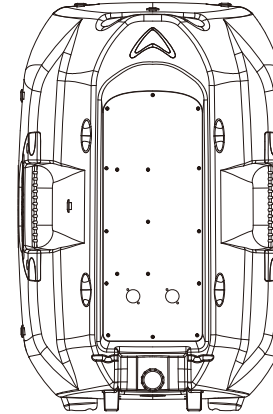
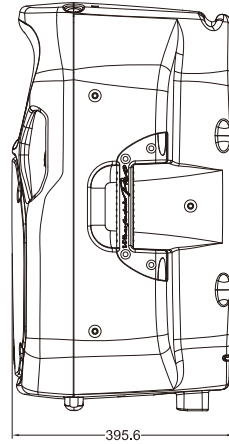
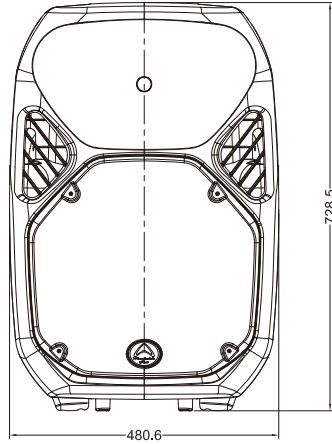


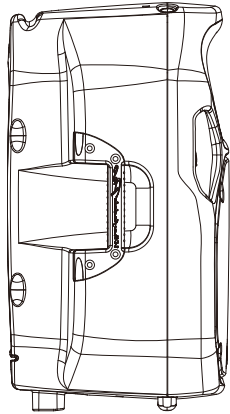

MODEL : **TITAN-X15**



System Type	Passive
Configuration	15" 2-way
Frequency Response (+/-3dB)	50Hz-20kHz
Frequency Range (-10 dB)	40Hz-20kHz
Sensitivity (2.83v/1m)	97dB
Calculated Maximum SPL @1m	129dB
System Rated Impedance	8Ω
<b>Low Frequency Transducer</b>	
Size	381mm / 15"
Voice Coil Size	75mm / 3.0"
Rated Impedance	8Ω
LF Power (re:AES2-2012)	400w
<b>High Frequency Transducer</b>	
HF Driver Type	Compression Driver
Voice Coil Size	44mm / 1.75"
Exit Size	25mm / 1"
Diaphragm Material	Titanium
Rated Impedance	8Ω
HF Power (re:AES2-2012)	40w
Nominal Coverage (H x V)	Hybrid Symmetry Horn 100°x80°
<b>Power</b>	
System Continuous Power	400w
System Programme Power	800w
System Peak Power	1600w
Crossover frequency	2.7kHz
Input Connector	2 x NL4 (speakON compatible)
<b>Hardware</b>	
Pole Mount	35mm with lock screw
Handles	2 on sides
Rigging points	M8 * 10
<b>Enclosure</b>	
Enclosure Material	Trapezoidal / Polypropylene
Finish	Black / white
<b>Grille Material &amp; Finish</b>	
Grille Material	1.2 steel
<b>Dimensions - Unpacked</b>	
Height	728.5mm / 28.7"
Width Front	480.6mm / 18.9"
Width Rear	480.6mm / 18.9"
Depth	395.6mm / 15.6"
<b>Dimensions - Packed</b>	
Height	830mm / 32.7"
Width Front	514mm / 20.2"
Width Rear	514mm / 20.2"
Depth	489mm / 19.3"
Weight	
Net Weight (kg / lbs)	22.0kg / 48.4lbs
Gross Weight (kg / lbs)	26.8kg / 59.0lbs