



Wharfedale
Pro


MODEL : **WLA-25**

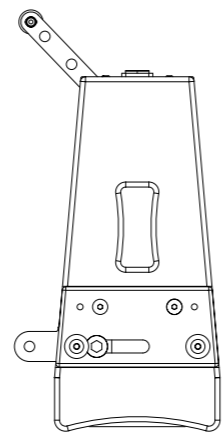


SIDE VIEW

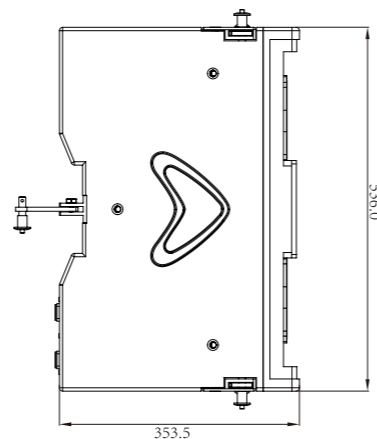


TOP VIEW

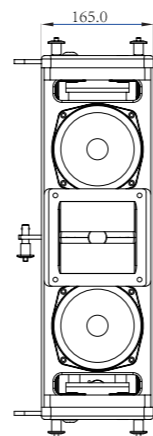

FRONT VIEW

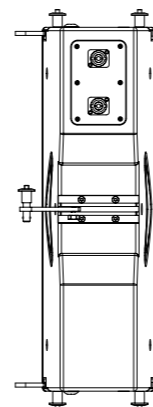

REAR VIEW

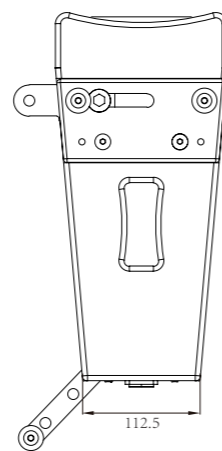

SIDE VIEW

System Type	Passive
Configuration	Two-way
Frequency Response (+/-3dB)	108Hz-18KHz
Frequency Range (- 10 dB)	108Hz-20KHz
Sensitivity (2.83v/1m)	HF:108dB/LF:100dB
Calculated Maximum SPL @1m	HF:135dB/LF:127dB
System Rated Impedance	16Ω
Low Frequency Transducer	
Size	2 x 130mm / 5"
Voice Coil Size	35.0mm / 1.4"
Rated Impedance	16Ω
LF Power (re:AES2-2012)	2 x 60W
High Frequency Transducer	
HF Driver Type	Compression Driver - Neo
Voice Coil Size	44mm / 1.75"
Exit Size	1"
Diaphragm Material	Titanium
Rated Impedance	16Ω
HF Power (re:AES2-2012)	40W
Nominal Coverage (H x V)	100° x 10°
Power	
System Continuous Power	120W
System Programme Power	240W
System Peak Power	480W
Crossover frequency	3.7KHz
Input Connector	2 x speakON compatible
Hardware	Integral side plate adjustable rigging 0°-10°
Enclosure	
Enclosure Material	15mm,18mm Plywood
Finish	Rhino Black or white paint
Grille Material & Finish	Steel
Dimensions - Unpacked	
Height	536mm / 21.10"
Width Front	363mm / 14.29"
Width Rear	363mm / 14.29"
Depth	164.5mm / 6.47"
Dimensions - Packed	
Height	606mm / 23.85"
Width Front	430mm / 16.92"
Width Rear	430mm / 16.92"
Depth	235mm / 9.25"
Weight	
Net Weight (kg / lbs)	13kg / 28.6lbs
Gross Weight (kg / lbs)	15kg / 33.0lbs

