



Wharfedale  
Pro


MODEL : **WLA-28**

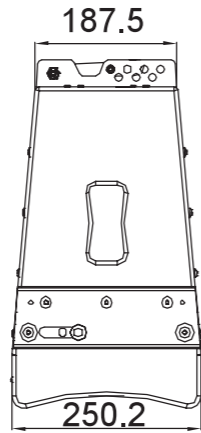


SIDE VIEW

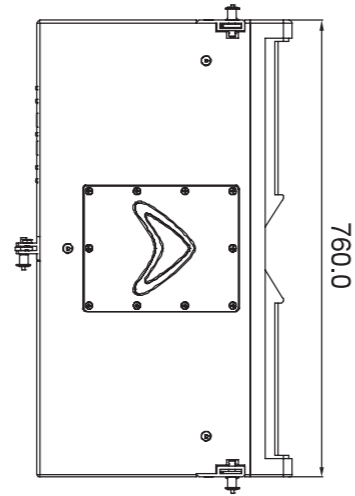


TOP VIEW

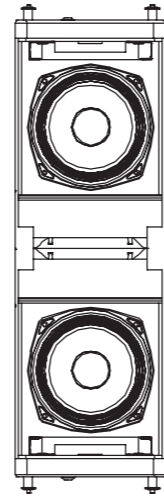

FRONT VIEW

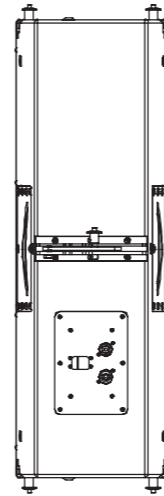

REAR VIEW

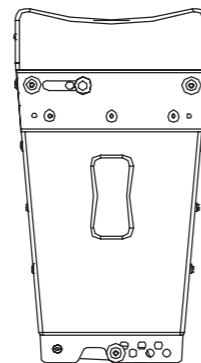

SIDE VIEW

System Type	Passive
Configuration	Two-way 2 x 8"
Frequency Response (+/-3dB)	70Hz - 20kHz
Frequency Range (-10 dB)	65Hz - 20kHz
Sensitivity (2.83v/1m)	100dB
Calculated Maximum SPL @1m	LF:128dB HF:132dB
System Rated Impedance	16Ω
<b>Low Frequency Transducer</b>	
Size	2 x 203.2mm / 2 x 8"
Voice Coil Size	50.8mm / 2"
Rated Impedance	8Ω
LF Power (re:AES2-2012)	2 x 200W
<b>High Frequency Transducer</b>	
HF Driver Type	Compression Driver
Voice Coil Size	81.3mm / 3.2"
Exit Size	35.56mm / 1.4"
Diaphragm Material	Titanium
Rated Impedance	8Ω
HF Power (re:AES2-2012)	80W
Nominal Coverage (H x V)	100° x 10°
<b>Power</b>	
System Continuous Power	LF:400W HF:75W
System Programme Power	LF:800W HF:150W
System Peak Power	LF:1600W HF:300W
Crossover frequency	1.8kHz
Input Connector	2 x speakON compatible
<b>Hardware</b>	
	Integral side plate adjustable rigging 0°-10°
<b>Enclosure</b>	
Enclosure Material	15mm Plywood
Finish	Rhino Black Paint
Grille Material & Finish	1.2mm Black Steel
<b>Dimensions - Unpacked</b>	
Height	250mm / 9.84"
Width Front	424mm / 16.69"
Width Rear	424mm / 16.69"
Depth	760mm / 29.92"
<b>Dimensions - Packed</b>	
Height	375mm / 14.76"
Width Front	545mm / 21.46"
Width Rear	545mm / 21.46"
Depth	855mm / 33.66"
<b>Weight</b>	
Net Weight (kg / lbs)	27kg / 59.52lbs
Gross Weight (kg / lbs)	33kg / 72.75lbs

