



Wharfedale
Pro

MODEL : **WLA-28SUB**




485.0

SIDE VIEW

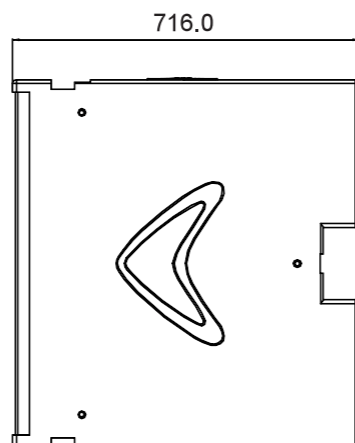


716.0

TOP VIEW

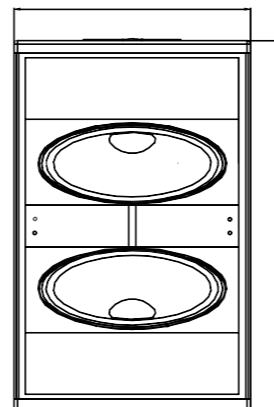

760.0

FRONT VIEW

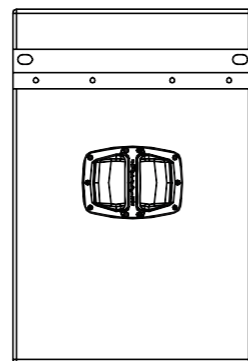

SIDE VIEW

System Type	Passive
Configuration	2 x 15" subwoofer
Frequency Response (+/-3dB)	39Hz-900Hz
Frequency Range (-10 dB)	39Hz-1.5kHz
Sensitivity (2.83v/1m)	108dB
Calculated Maximum SPL @1m	145dB
System Rated Impedance	4Ω
Low Frequency Transducer	
Size	2 * 381mm / 15"
Voice Coil Size	100mm / 4"
Rated Impedance	2 x 8Ω
LF Power (re:AES2-2012)	2 x 600w
High Frequency Transducer	
HF Driver Type	-
Voice Coil Size	-
Exit Size	-
Diaphragm Material	-
Rated Impedance	-
HF Power (re:AES2-2012)	-
Nominal Coverage (H x V)	-
Power	
System Continuous Power	1200W
System Programme Power	2400W
System Peak Power	4800W
Crossover frequency	No
Input Connector	2 x speakON compatible
Hardware	
	Integral side plate non adjustable
Enclosure	
Enclosure Material	15mm,18mm Plywood
Finish	Rhino Black Paint
Grille Material & Finish	1.2mm Black Steel
Dimensions - Unpacked	
Height	485mm / 19.1"
Width Front	716mm / 28.2"
Width Rear	716mm / 28.2"
Depth	760mm / 29.9"
Dimensions - Packed	
Height	850mm / 33.5"
Width Front	575mm / 22.6"
Width Rear	575mm / 22.6"
Depth	806mm / 31.7"
Weight	
Net Weight (kg / lbs)	61.2kg / 134.6lbs
Gross Weight (kg / lbs)	66kg / 145.2lbs